

Optimization Technique-Supply Chain in Reverse Logistics

L. K. Toke

**Department of Mechanical Engineering
Shri Sant Gadge Baba College of Engineering and Technology
ZTC, Bhusawal, Maharashtra – 425201 India**

R. C. Gupta and Milind Dandekar

**Department of Industrial and Production Engineering
Shri.G.S.I.T.S. Indore Madhya Pradesh- 452003, India**

Abstract

Supply chain planning systems in reverse logistics present the industry with new problems that demand new approaches. The specific problem of the reverse logistics for the end-of-life (EOL) products addressed in this study is to determine the number of products to disassemble in a given time period to fulfill the demand of various components during that and subsequent time periods. We present a mathematical programming based model to solve the problem. When the problem is solved, it gives the number and timing of each product type to be disassembled in order to fulfill the demand of components needed at minimal disassembly and disposal costs.

Keywords

Disassembly, remanufacturing, reverse logistics, supply chain planning

1. Introduction

The supply chain planning in reverse logistics of end-of-life (EOL) products embraces many different characteristics of environmentally conscious manufacturing, including disassembly, reuse, recycling, and remanufacturing [1]. As manufacturers change from isolated business units to integrated network partners, they require effective and efficient Supply Chain Planning (SCP) strategies for materials, components, and products. SCP can help speed up the reverse logistics through the availability of online marketplace to support the networking of environmentally conscious product suppliers, manufacturers, distributors and customers. Online marketplace allows manufacturers and their network of suppliers and strategic partners to collaborate and conduct business over the internet, which aims to reduce the cost of doing business and boost the efficiency of participants (Fig. 1). This research focuses on the SCP system in reverse logistics to provide a way in which manufacturers can reclaim various models of a product for remanufacturing [2, 3]. The operational characteristics of reverse logistics are different from their manufacturing counterpart [4]. The challenge here is to model the system so that it can facilitate both intra- and inter-enterprise supply chain networks for collecting and remanufacturing EOL products. This network can be modeled as a supply chain, where products flow in both directions. A reverse supply chain represents the products collected from consumers and businesses back to manufacturers. They may consist of end-of-lease products, product traded-ins, and products returned due to legislative requirements. A forward supply chain represents the flow of items from manufacturers back to the consumers as refurbished products or components. Some of the unique characteristics of the reverse logistics problem are highlighted below.

1.1 Supply/Demand Balancing

Perhaps the most difficult variable to forecast is the distribution of the returns of EOL or end-of-lease products over the planning horizon. Forecasters often face unexpected supply/demand patterns that will depend on their product's success in the market and competing products.

1.2 Accumulation

There will be accumulations of certain kinds of parts due to uneven market demands for certain components. For instance, there may be higher demands for certain models of memory chips and hard drives while other dismantled parts with no demand pile up on the operations floor.

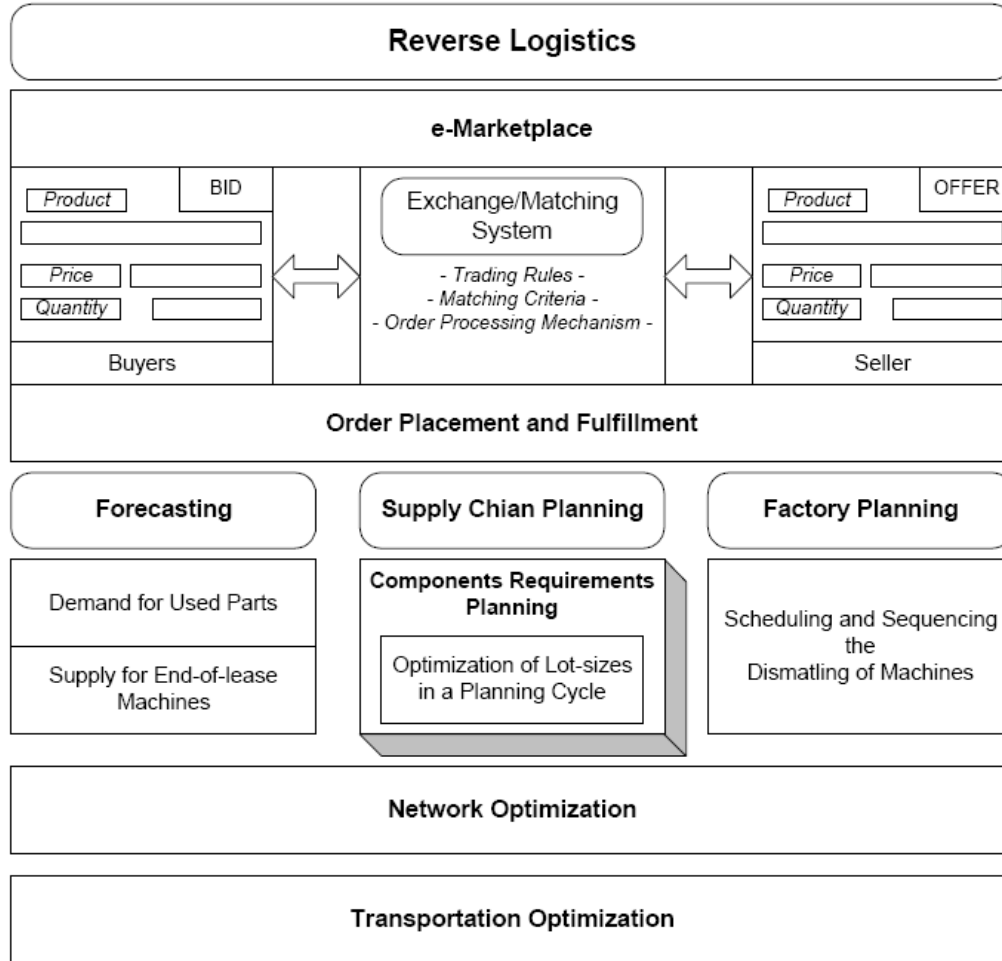


Figure 1: Supply Chain Planning Model for Reverse Logistics

1.3 Logistical Network

In a reverse logistics supply chain environment there will be potentially three separate entities: the assembly plant, the disassembly plant and the recycling plant. Operations therefore have to be planned from a larger perspective that comprise those three entities. The inventory policies will alter in terms of the level and location of buffer stocks. From the supply of products, to collection, to dismantling, to reuse and/or recycling, the inventory of products and components must be properly maintained to balance the supply and demand of resources.

1.4 Transportation

Plant location decisions are influenced by the transportation cost of raw materials. However, when dealing with disassembly and recycling, the control for the flow of products is expected to increase several folds. Manufacturers will have to consider this problem and plan the locations of new assembly, disassembly or recycling plants appropriately. The main focus in this paper is on the systematic decision making approach used to determine the number of products to disassemble in a given time period to fulfill the demand of various components during that and subsequent time periods. The paper is organized as follows. The next section briefly describes the areas of

remanufacturing and planning for disassembly, which are important aspects of reverse logistics. Section 3 discusses economic, environmental and operations problems in reverse logistics. Section 4 presents the problem statement. Section 5 addresses the Components Requirement Planning (CRP) procedure for the optimization of reverse logistics. Section 6 illustrates the procedure. Finally, section 7 provides some conclusions.

2. Background

A process of producing products by employing used parts yet having quality standards of new products is called remanufacturing. This process restores worn-out products to “like-new” conditions at a considerably reduced cost. The planning and control functions of remanufacturing are significantly more complicated than traditional manufacturing [6]. Because of this, developing analytical models to analyze remanufacturing systems is a challenging task. One particular requirement in a remanufacturing system is the need to disassemble reclaimed products based on the demand of their components. Previous works in the area of product disassembly can be classified into two categories based on the technique that is employed, viz., planning and scheduling, and the application of mathematical optimization methodology. Many authors have looked at product disassembly in order to fulfill the demand of the components. Gupta and Taleb[7] presented an algorithm for scheduling the disassembly of a discrete, well-defined product structure. The algorithm determines the disassembly schedule for the components such that the demands for those components are satisfied. In their subsequent papers, Taleb and Taleb and Gupta [8, 9] improved the methodology to include components/materials commonality as well as the disassembly of multiple product structures. However, they did not address the remanufacturing problem. Some authors have applied mathematical programming in the area of materials and components reclamation. Isaacs and Gupta[10] investigated the impact of automobile design on disposal strategies by using goal programming to solve the problem. Veerakamolmal and Gupta[11] employed mathematical programming to balance the lot sizes for the disassembly of multiple products. The methodology optimizes the number of products of various types for disassembly in order to fulfill the demand for components. The result offers the minimum lot size for disassembly while maximizing the revenue from selling the retrieved components.

3. Problems Encountered in Reverse Logistics

3.1. Economic Problems

The last few years have seen a tremendous growth in the demand for durable consumer goods. The rapid development and improvement of products have given rise to additional demand resulting in shortened lifetime of most products. This in turn has increased the quantity of used products scrapped. The bulk of the scrap comes from automobiles, household appliances, consumer’s electronic goods, and at an increasing rate from computers. In reverse logistics, the value of returned products may decrease more rapidly than their new counterparts. Accelerating the process of the reverse supply chain to drive value preservation is critical. Coupled with the rapidly increasing return volumes, the complexity of return logistics becomes problematically complex.

3.2. Environmental Problems

The most prominent evidence of our environmental problem comes from the growing need for waste disposal. Originally, the majority of our municipal wastes were land filled. However, the shortcomings of our reliance on landfilling have become evident: they pose unacceptable environmental risks because of their location or simply because they have filled up, and they pose hazardous risks to human health through ground water contamination and toxic air emissions. As a result, numerous landfills, especially in larger cities where enormous amount of waste is generated every day, have closed down. While new landfills are being built at a relatively slower rate, they are located further away, thus sending the costs of hauling waste much higher. Furthermore, U.S. Congress passed a toxic waste cleanup bill known as “Superfund”, stating that the costs of cleaning up contaminated waste sites is shared among those who dispose. The growing expense of waste management has, in turn, helped justify the need to escalate recycling and reuse.

3.3. Operational Problems

Some of the types of questions that need answers include the following.

- What is the least number of machines I need in order to disassemble the parts demanded?
- What are the most economical machines to dismantle evaluating fair market value of the machine? Should we dismantle machines where the current residual value or fair market value is greater than the sum of the parts

(e.g. for computers, usually 5-6 parts are valuable: motherboard, display panel, keyboard, HDD, memory, CD-ROM drive)?

- Must the system always select the machines which yield more reliable parts when the yield of model is greater than or equal to other machines when dismantled to meet parts demand (e.g., 100 parts demanded can be found in Machine 1 and Machine 2. However, machine 1 has 80% reliability yield and Machine 2 has 50%)?

4. Problem Statement

The primary objective of the model developed in this paper is to provide a cost efficient way in which manufacturers can reclaim products for remanufacturing. We assume that the supply of products, which have been disposed of at the end of their lives, is finite. Since shortages in this supply are eminent which, in turn, lead to possible shortages in the supply of components for remanufacturing, the method has to account for the possibility of component inventory and/or ordering additional (new) components to fulfill the demand. After disassembly, unwanted components and materials are sent for recycling or proper disposal. Due to possible deterioration in the conditions of some recovered components, inventory of only certain components is maintained. The shelf life of each component may vary.

5. Components Requirements Planning Procedure

Components Requirement Planning (CRP) addresses the problem of determining the disassembly schedule for all the products. We assume that the batch of products to be disassembled is composed of two or more models of appliances belonging to the same product platform, i.e. there is component commonality within these products. The products are disassembled to obtain the various components. The terminology used in components requirements planning is explained below:

- Gross Requirements (GR_t)** : Demand of products and components in period t ;
Receipts from External Sources (SR_t) : Additional components received in period t from other sources (unplanned);
Available Balance (AB_t) : Number of components in inventory at the beginning of period t . Note that the number of items in inventory is influenced by the shelf life of each component; inventory is influenced by the shelf life of each component;

$$AB_t = \begin{cases} \text{Max}[0, OH_{t-1} - NU_{t-1} + \\ \text{Max}[0, (AB_{t-1} - GR_{t-1} + SR_{t-1} - ND_{t-1})], \text{ if } (SL > 0); \\ 0, \text{ otherwise} \end{cases} \quad (1)$$

- Net Requirement (NR_t)** : Number of components needed after accounting for Receipts from External Sources and Available Balance in period t ;

$$NR_t = \text{Max}[0, (GR_t - SR_t - AB_t)] \quad (2)$$

- On Hand from Disassembly (OH_t)** : Total yield of the component from the supply of products in period t ;

- Number Used From Disassembly (NU_t)** : Number of components used from disassembly;

$$NU_t = \text{Min}[NR_t, OH_t] \quad (3)$$

- Number of New Components Required (NC_t)**: The number of new components that have to be ordered in period t . This occurs when there are not enough components On Hand from Disassembly to satisfy the Net Requirement;

$$NC_t = \text{Max}[0, (NR_t - OH_t)] \quad (4)$$

- Number of Components Discarded (ND_t)** : Number of components that are not needed after disassembly and/or have reached the end of their shelf lives in period t ;

$$ND_t = \text{Max}[0, (OH_{t-SL} - NU_{t-SL} - GR_{t-SL+1} - GR_{t-SL+2} - \dots - GR_t)] + \text{Max}[0, (SR_{t-SL} - GR_{t-SL})] \quad (5)$$

- Assembly Lead Time (LT)** : The time it takes to assemble products;

- Ordering Lead Time (RT)** : The time required to obtain the products for disassembly;

- Shelf Life (SL)** : Number of periods that a component can be kept in inventory without becoming obsolete/degraded. An unwanted component has a shelf life of zero.

We assume the following:

- There is an upper limit to the number of each type of used product (S_i) available from the distributors in each time period.
- The dissembler may order any number of used products of each type (up to a maximum of S_i) from the distributors, in each time period, to fulfill the demand of components. Any additional need has to be fulfilled with new components.
- Quality control factors (QP_{ij}) are used to account for the possibility of damaged products due to normal wear and tear during their use, or other mishaps during the collection, disassembly, or retrieval processes.
- After the disassembly of products, the components with no demand are recycled for materials or sent to disposal.
- The demanded components are sorted into good quality and defective lots. The defective components are recycled for materials or sent to disposal. The good quality components are sold to the remanufacturer if they can be utilized in the current period. The good quality components, which cannot be utilized in the current period (over-supply), are recycled for materials or sent to disposal, if their shelf lives are zero. Otherwise, they are sold to the remanufacturer for use in the subsequent period(s).

We now present a supply chain optimization procedure to determine the lot-sizes of products (for disassembly) to obtain from the distributors to fulfill the components requirements for remanufacturing. The procedure, while determining if there is a potential shortage in the supply of reusable components, optimizes the lot-size of products to disassemble in each time period. It also provides the process planner with a detailed component retrieval plan, which leads to an enhanced CRP performance in the reverse logistics supply chain environment.

5.1 Procedure

Step 1: Input the required data such as: the length of the planning horizon (T), the demand of products to remanufacture (GR_t), and the maximum supply of products (S_i), (end-of-lease or available at each product distribution center) in period t , ($1 \leq t \leq T$). In addition, prepare product specific information such as: the disassembly times, the components commonality and multiplicity, the demand, the value, the weight, the recycling cost factor, and the disposal cost index for each component. Set $t = 1$.

Step 2: Determine the maximum yield for demanded components after quality percentages have been accounted for.

Step 3: Assess to see if there are enough components to fulfill the demand (that is, for each component P_j , check if $(NR_t) \leq$ maximum component yield). If yes, set the demand (D_j) equal to the Net Requirement (NR_t) of each component, and go to *Step 5*. If not, proceed to *Step 4* for shortage adjustment.

Step 4: Calculate the number of components to order from outside sources (NC_t) to make up for the shortage(s). Since any potential shortage would be fulfilled by placing the order for new components (NC_t), D_j can be obtained by deducting NC_t from the Net Requirements (NR_t) [$(D_j) = (NR_t) - (NC_t)$].

Step 5: Formulate and solve the IP model. Using the demand of reusable components (D_j), the maximum supply of products (S_i), and the product/component specific information, obtain the number of products to order for disassembly and the net profit (or loss) from the resale, recycle and disposal of components as demonstrated in Gupta.[12].

Step 6: Update the CRP table. For the current time period, update OH_t , NU_t , NC_t and ND_t . Note that the number of defective components must be deducted from component yield [$(OH_t) = (OH_t) - (QP_{ij} \times Q_j \times Y_i)_t$]. Also, since damaged stock is recycled and/or disposed of in the same period, the modified number of components discarded in period t (ND_t) becomes the sum of the actual ND_t and the damaged component yield [$(ND_t) = (ND_t) + (QP_{ij} \times Q_j \times Y_i)_t$].

Step 7: Check if the whole planning horizon has been planned ($t = T$). If yes, proceed to *Step 8*. If not, set $t = t + 1$ and go to *Step 2*.

Step 8: Stop.

6. Conclusions

An optimization-based procedure was applied to solve the supply chain planning problem in the reverse logistics. The objective was to find the most economical combination of products to disassemble (to fulfill the demand for different types of reusable components, while keeping the quantity of partially discarded products in check, and incur the least disposal cost) in each period of the planning horizon. When the problem is solved, it gives the number of each product type to be disassembled in order to fulfill the demand of components needed at minimal disassembly and disposal costs. Hence, from the supply chain perspective, this would result in minimal inventory requirements on both ends—supply of EOL products and disassembled components of the reverse logistics chain. Some guidelines for managing reverse logistics are as follows: ·

- Establish strong processes and infrastructure to set a strong foundation. ·
- Challenge to manage multiple initiatives across from design, to production, to maintenance, to end-of-lease management, remanufacturing, to disposal.
- Facilitate the collaborative forecasting and planning effort between the functions of part sales, logistics, and the supply/demand coordinator
- Preserve the value by managing the flow through the supply chain, thus reducing the cycle time.
- Provide timely disposition decisions to reduce inventory costs.
- Enable parts auction, sales, and trading exchange through e-marketplace.

Acknowledgement

I am very grateful to Dr. R.C.Gupta and Dr. Milind Dandekar for giving the right guidance regarding my research work and helping me to improve my work as preciously it possible.

References

1. A. Gungor, and S. M. Gupta, "Issues in Environmentally Conscious Manufacturing and Product Recovery: A Survey", *Computers and Industrial Engineering*, vol. 36, no. 4, pp. 811-853, 1999.
2. L. Goldberg (Ed.), *Green Electronics/ Green Bottom Line: Environmentally Responsible Engineering*, Butterworth- Heinemann; (Newnes), ISBN: 0-7506-9993-0, 2000.
3. E. Grenchus, R. Keene, and C. Nobs, "Demufacturing of Information Technology Equipment", *Proceedings of the 1997 IEEE International Symposium on Electronics and the Environment*, May 5-7, San Francisco, California, pp. 157- 160, 1997.
4. V. D. R. Guide, R. Srivastava, and M. S. Spencer, "An Evaluation of Capacity Planning Techniques in a Remanufacturing Environment", *International Journal of Production Research*, vol. 35, no. 1, pp. 67-82, 1997.
5. J. M. Bloemhof-Ruwaard, P. Beek van, L. Hordijk and L. N. Van Wassenhove, "Interactions Between Operational Research and Environmental Management", *European Journal of Operational Research*, vol. 85, pp. 229-243, 1995.
6. V. D. R. Guide, and R. Srivastava, "Inventory Buffers in Recoverable Manufacturing", *Journal of Operations Management*, vol. 16, no. 5, pp. 551-568, 1998.
7. S. M. Gupta, and K. Taleb, "Scheduling Disassembly", *International Journal of Production Research*, vol. 32, no. 8, pp. 1857-1866, 1994.
8. K. Taleb, S. M. Gupta, and L. Brennan, "Disassembly of Complex Products with Parts and Materials Commonality", *Production Planning and Control*, vol. 8, no. 3, pp. 255-269, 1997.
9. K. Taleb, and S. M. Gupta, "Disassembly of Multiple Product Structures", *Computers and Industrial Engineering*, vol. 32, no. 4, pp. 949-961, 1997.
10. J. A. Isaacs, and S. M. Gupta, "A Decision Tool to Assess the Impact of Automobile Design on Disposal Strategies", *Journal of Industrial Ecology*, vol. 1, no. 4, pp. 19-33, 1997.
11. P. Veerakamolmal, and S. M. Gupta, "Optimal Analysis of Lot-Size Balancing for Multiproducts Selective Disassembly", *International Journal of Flexible Automation and Integrated Manufacturing*, vol. 6, no. 3-4, pp. 245- 269, 1998.
12. S. M. Gupta, Y. J. Lee, X. Zanthopoulos, and P. Veerakamolmal, "An Optimization Approach for A Reverse Logistics Supply Chain", *Proceedings of the International Group Technology and Cellular Manufacturing Conference*, March 26- 29, San Juan, Puerto Rico, 2000.