

Designing ecofriendly Product-Service Systems (PSSs) through morphological reasoning

Nicolas Haber*, **Mario Fagnoli**** and **Massimo Tronci*****

Department of Mechanical and Aerospace Engineering
Faculty of Civil and Industrial Engineering, Sapienza - University of Rome
Via Eudossiana, 18, Rome 00184, Italy

*nicolas.haber@uniroma1.it, **mario.fagnoli@uniroma1.it, ***massimo.tronci@uniroma1.it

Ahmad Ababneh

Department of Management
Sapienza – University of Rome
Via del Castro Laurenziano 9, Rome 00161, Italy
ahmad.ababneh@uniroma1.it

Abstract

Product-Service Systems (PSSs) have emerged in the last years as a means of integrating products and services in a coordinated manner, to deliver functional results that increase customer value while achieving environmental sustainability. Nevertheless, the design and development of these systems is hindered by the absence of consistent and robust approaches that facilitate their implementation. The initial phases of the design of any solution, product or service oriented, are the vital stages where its key elements are determined. The research proposes a functional approach based on morphological reasoning to address the PSS design concerns. The approach enables the integration of products and services while capturing the values and costs of their respective providers and receivers. Life cycle modeling is then applied to evaluate the environmental impact of such a concept while a cost analysis portrays the economic benefits that can be achieved. A case study at an agricultural manufacturer demonstrates the use of the described approach and exhibits the advantages that can be achieved through a PSS application.

Keywords

Product-service systems; morphological thinking; functional analysis; life cycle assessment; life cycle costing

1. Introduction

Product-Service Systems (PSSs) have significantly expanded in recent years allowing manufacturers to achieve economic benefits through increased customer satisfaction while improving the environmental performance of their offerings (Lindahl et al., 2014; Meier et al., 2010; Fagnoli et al. 2018). To achieve these goals, PSSs consist of shifting from stand-alone product sales towards the provision of functional results (Tukker, 2004). As noted by Mont (2002) and Beuren et al. (2013) manufacturers integrate services in their offerings as a means of achieving these functional results which leads to innovative solutions and an improved market position. Alongside the “business” advantages that PSSs offer, several advantages also relate to the environment as the consumed resources are minimized, the product and its use are optimized, the life cycle of the solution is improved, and several End-of-Life (EoL) strategies can be put in place such as recycling, reconditioning and product recovery schemes (Tran and Park, 2015; Haber and Fagnoli 2017a). Nevertheless, caution is advised as PSSs can have detrimental “rebound” effects from an ecological standpoint if uncarefully implemented (Tukker and Tischner, 2006). A consequence would be the achievement of economic outcomes at the expense of unwanted environmental outcomes thus jeopardizing the feasibility and success of the PSS (Tukker, 2004; Bocken et al., 2014).

To achieve these benefits, suitable stakeholder networks and innovative thinking that allow an effective integration of products and services are required (Baines et al., 2007; Meier et al. 2010; Sakao and Fagnoli 2010; Durugbo, 2013; Vasantha et al. 2012; Vezzoli et al. 2015). Several studies were proposed as possible ways to successfully implement a PSS in practice (i.e. Baines et al., 2007; Sakao and Lindahl, 2009; Sakao et al., 2009; Haber, 2017).

While the extent of research carried out in this context (Morelli, 2006; Lee and Abu Ali, 2010; Masanell and Ricart, 2010; Geum et al., 2011; Barquet et al., 2013; Carreira et al., 2013; Marques et al., 2013; Touzi et al., 2013; Zine et al., 2014; Trevisan and Brissaud, 2016) reflects the popularity of integrated product-service solutions (i.e. PSSs), it also highlights the existing deficiencies for designing and developing these functional offerings (Maussang et al., 2009; Amaya et al., 2014; Exner et al., 2014).

In fact, Tran and Park (2014) argue that the main hindrance that occurs when developing PSSs resides in the integration process: combining product and services in a practical manner on one hand while creating value for manufacturers and customers alike on the other. The integration process for PSSs descends mainly from product development (Scheuing and Johnson, 1989; Oliva and Kallenberg 2003; Shekar, 2007; Haber and Fargnoli, 2017a) yet the adaptation of some product development and design approaches are impractical from a PSS point of view (Tran and Park, 2014). In addition, an inadequate adaptation (and implementation later) may result in a negative environmental impact which opposes one of the key objectives of a PSS, i.e. a lower environmental impact than traditional business models (Mont, 2004; Baines et al., 2007; Tischner et al., 2009; Reim et al., 2014)

As pointed out by Aurich et al. (2010) and Vasantha et al. (2012), while implementing a PSS approach, the main difficulties arise in the conceptual design stage, when a decision has to be taken as to which solution better accomplishes both customer needs as well as environmental concerns.

Based on the considerations and to address the issues mentioned above, this paper seeks to answer the following Research Questions (RQ):

RQ. How to select a suitable PSS solution that satisfies both the customers' and company's expectations?

To address the RQ, we utilize a functional decomposition approach to develop PSSs using morphological thinking as a means of generating and developing PSSs at a conceptual level since it is at this stage the focal components of the solution are defined (Haber and Fargnoli, 2017b). The proposed approach is then applied at an agricultural equipment. Its feasibility is verified through the Screening Life Cycle Modeling (SLCM) method (Fargnoli and Kimura, 2006), while also a cost analysis was performed to evaluate the benefits achieved. This contributes in extending current PSS studies when it comes to comprehensively addressing the elements of a PSS to achieve environmentally friendly results. The rest of the paper is articulated as follows: Section 2 illustrates the proposed approach, which is carried out at a case study in section 3. Section 4 discusses the achieved results while section 5 concludes the article and reflects on future work.

2. Proposed approach

The following section addresses the incentives and description of the proposed approach for PSS design. The first section (2.1) briefly describes the function-oriented morphological matrix and exposes its proposed adaptation to a PSS context. The second section (2.2) defines the PSS assessment model while section 3 schematizes the framework for PSS concept development.

2.1 PSS design

The motivations towards adopting a functional approach to developing PSS concepts lie within their predecessor's (i.e. stand-alone products) approach to generating solutions. As argued by Andreasen (1992), a system is represented by a main function consisting of sub and elementary functions that meet the customers' requirements when effectively combined. Furthermore, a functional approach facilitates the design and development of a solution as its decomposition into modular tasks (i.e. sub-functions) reduces business risks and facilitates the product-service integration process (Cavalieri and Pezzotta, 2012; Tukker, 2013). Morphological thinking is an effective form of functional reasoning as it decomposes multi-dimensional tasks and activities into sub-tasks and sub-activities, notably useful in engineering design (Zwicky, 1948). Furthermore, in such a context, it facilitates the representation and exploration of the design activities by listing the functions and their derivatives against their respective actuators (Table 1) (Pahl and Beitz, 2007; Ulrich and Eppinger, 2008).

Table 1. Scheme of the morphological matrix (adapted from George, 2012)

Function	Actuators to realize each function			
F ₁	AC _{1,1}	AC _{1,2}	...	AC _{1,m}
F ₂	AC _{2,1}	AC _{2,2}	...	AC _{2,m}
⋮	⋮	⋮	⋮	⋮
F _n	AC _{n,m}	AC _{n,m}		AC _{n,m}

PSS conceptualization and design differ from conventional product design by the insertion of services to achieve the required overall function. The latter requires integrating human actors such as providers and receivers

who play a pivotal role regarding service quality and interactions. Once the main function is outlined and well defined, it can be divided into sub-functions. Moreover, the providers and receivers are also fragmented: each sub-function will require its own PSS Provider (SP) and Receiver (SR). To clarify the service actors and their respective activities, Kim et al. (2010) suggest the use of the Service Blueprint (SB) illustrating the providers and receivers' involvement (Figure 1). On the one hand, the internal interactions are invisible to the PSS receiver (s) and comprise of actions and activities within the manufacturer's environment. On the other hand, external interactions represent the activities visible to the PSS receiver (s). In our context, these activities, both visible and invisible will be treated as functions that comprise of their respective actors and measures to fulfill them (e.g. actuators) (Haber, 2017).

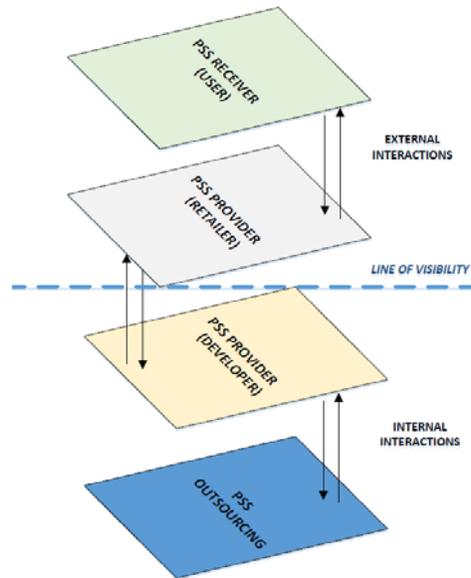


Figure 1. Adapted PSS blueprint

The functions, actuators, providers, and receivers have to be addressed comprehensively for a successful product-service integration that maximizes value for all the stakeholders involved (i.e. providers and receivers). Hence the morphological matrix is adapted to a PSS setting as can be seen in Table 2. Each sub-function requires its specific actuator(s), provider(s) and receiver(s) and is then evaluated to bring forward its associated costs and value at a preliminary level (Table 3).

Table 2. Morphological matrix in a PSS setting (adapted from Haber and Fargnoli, 2017)

Sub-Functions	Elementary Functions	Product/Service Actuators			Actuator Provider		Actuator Receiver	
		P/SA1.1	P/SA1.2	P/SA1.3	SPA1.1	SPA1.2	SRA1.1	SRA1.2
PSS sub function A	A.1	P/SA1.1	P/SA1.2	P/SA1.3	SPA1.1	SPA1.2	SRA1.1	SRA1.2
	A.2	P/SA2.1	P/SA2.2	P/SA2.3	SPA2.1	SPA2.2	SRA2.1	SRA2.2
	A.3	P/SA3.1	P/SA3.2	P/SA3.3	SPA3.1	SPA3.2	SRA3.1	SRA3.2
	A.4	P/SA4.1	P/SA4.2	P/SA4.3	SPA4.1	SPA4.2	SRA4.1	SRA4.2
PSS sub function B	B.1	P/SB1.1	P/SB1.2	P/SB1.3	SPB1.1	SPB1.2	SRB1.1	SRB1.2
	B.2	P/SB2.1	P/SB2.2	P/SB2.3	SPB2.1	SPB2.2	SRB2.1	SRB2.2

Table 3. Descriptive evaluation of the PSS sub-functions

Elementary Function	Product/Service Actuator	PSS Provider	PSS Receiver	Value for Provider	Cost for Provider	Value for Receiver	Cost for Receiver
A.1	P/SA1.2	SPA1.2	SRA1.1	Value-PA1.2	Cost-PA1.2	Value-RA1.1	Cost-RA1.1
A.2	P/SA2.1	SPA2.1	SRA2.2	Value-PA2.1	Cost-PA2.1	Value-RA2.2	Cost-RA2.2
...

The matrix is continuously filled out until all functions (Table 2) have been described

2.2 PSS modeling

Although numerous studies have addressed the sustainability assessment of PSSs (Morelli, 2006, Vezzoli et al., 2014; Shimomura et al., 2015; Chou et al., 2015), few research works have proposed tools for dealing with it in the early design stages of their development (Fargnoli et al., 2014; Sousa-Zomer and Miguel, 2017).

In product design, the most common approach to analyze and improve environmental performance is the Life Cycle Design (LCD), which is aimed at the identification and evaluation of the environmental performances of a product through all the phases of its lifecycle (Kobayashi, 2006; Kimura 2007; Umeda et al., 2012; Fargnoli et al., 2013; Cluzel et al., 2014).

Accordingly, a life-cycle design approach can be effectively applied to evaluate the environmental performances of a PSS (Aurich et al., 2006), where the focus of the analysis is represented by the functional units, since a PSS includes both tangible and intangible elements.

In such a context, the development of a product life cycle simulation (Life Cycle Modelling, LCM) allows the integration of the PSS technical issues and its management, enabling engineers to evaluate the environmental performances of the system along with the duration of the PSS contract. With this goal in mind, the SLCM method can be used, as means to make a comparison between different PSS scenarios, according to a limited number of factors regarded as particularly important (Fargnoli et al., 2012). Such a tool consists of a streamlined life cycle simulation aimed at evaluating the main environmental impacts related to a system life cycle where the assessment criteria are based on the ones which characterize the traditional LCA. The main phases of the method can be summarized as follows (Haber and Fargnoli, 2017a):

- Base Scenario (BS) definition, where the life cycle model of the existing system is defined;
- Alternative Scenario/s (AS) definition, where one or more models are developed based on the design requirements provided in the earlier stages of the design process.
- Simulation, where the life cycle analysis of both the BS and the AS is carried out.
- Analysis of results, where the results of the simulation are compared and critically analyzed in order to deploy a feasibility study

In order to obtain more efficacious results, the design requirements based on which the scenarios' development is based should be defined by means of techniques that allow engineers to capture the customers needs, such as questionnaires and interviews, as well as the Quality Function Deployment (QFD) based tools (Kim and Yoon, 2012; Fargnoli and Sakao, 2017).

2.3 General framework for PSS conceptual design

Based on the above considerations a general framework for the development of PSS can be drawn up, focusing the conceptual design stage in order to provide a feasible functional solution that can meet both the company and the customers' needs. A scheme of such a framework is represented in Figure 2, where only the conceptual phase of the PSS development process is represented.

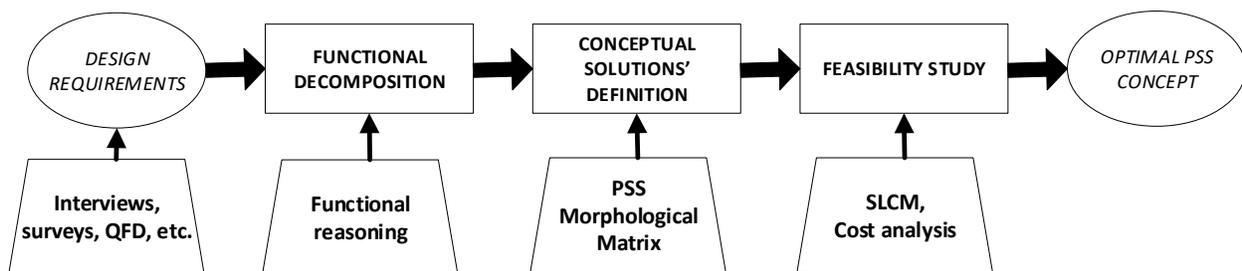


Figure 2. Scheme of the proposed approach

3. Case study

3.1 Overview

To verify the practicality of the PSS conceptual design framework, it was tested through the following case study, which took place at a manufacturer operating in the agricultural sector. In detail, the manufacturer produces Lawn Mowers (LMs) which are used in gardening applications. The LM weighs 48kg and consists of 4 main components: a 2.4 kW engine (displacement 150 cubic centimeters), a self-propelled single-gear advancement system, an aluminum mower deck and an endowment system.

Despite the growth of this market, the manufacturer noted a revenue-decrease due to decreased sales of the product. Accordingly, he wants to address this topic by implementing a PSS rather than keeping his conventional sales-based business model.

The LM is destined for non-professional and semi-professional users owning small and medium sized gardens. Its lifespan is of 10 years and the engine is warranted for 500 operational hours.

Market surveys performed by the manufacturer's marketing and customer care personnel underlined the customers' complaints regarding the reliability of the LM and its maintenance. The main findings of this analysis can be summarized as follows:

- although the LM is designed for 10 years, its average lifespan is approximately 7 years due to the negative effects of incorrect maintenance (often carried out by the users themselves);
- since the cost of a new engine represents 60% of the price of a new product, customers opt for a new equipment instead.

In addition, the surveys revealed the customers' interest in environmentally friendly solutions when purchasing a LM.

Considering the above information, the study opted for a business model focusing on a life cycle perspective as the correct management of the product's (i.e LM) life cycle can improve its environmental impact and reliability. Accordingly, this would lead to better customer satisfaction as well.

To address the maintenance concerns, which are the basis of the customers' current dissatisfaction, the manufacturer is seeking to keep the ownership of the LM as a means of ensuring its correct maintenance and thus reliability and performance. To do so, the manufacturer wishes to develop a leasing scheme, which falls under the category of Use-Oriented PSSs (Tukker, 2004). Following this scheme, the manufacturer is responsible for the production, maintenance and disposal of the LM while the customer pays a fee for its use for a specific period of time. Accordingly, we carried out an additional analysis in collaboration with the experts from the Italian Ministry of Agriculture and from the National Union of Agricultural Machinery Dealers (UNACMA): 10 different dealers of gardening equipment were interviewed by means of a semi-structured questionnaire concerning the main maintenance activities carried out in the last 5 years on this type of LMs, the type of operations, and the costs. The results of this analysis allowed us to define a set of PSS design requirements that accomplish the new business model.

3.2 Application of the PSS morphological approach

The development of the leasing scheme takes place according to the suggested design approach exposed in section 2.1. The main function to fulfill is "grass cutting" and it is decomposed into sub-functions where the fulfillment of each contributes to the holistic solution (Table 4).

Table 4. Functional decomposition of "grass cutting"

Main Function	Grass cutting			
Sub-functions	1. Gathering customer information	2. Providing cutting	3. Providing maintenance	4. Providing End of Life (EoL) service
Elementary functions	N/A	2.1 Providing cutting equipment	3.1 Providing ordinary maintenance	4.1 Providing recovery of the LM
		2.2 Delivering cutting equipment		
		2.3 Providing cutting settings	3.2 Providing extraordinary maintenance	4.2 Providing EoL treatment of the LM
		2.4 Providing cutting activity		

Then, the morphological matrix adapted to PSSs was applied to identify the actuators, providers and receivers of each function.

The evaluation of each function is then carried out to provide feasible solutions that meet the design requirements aimed at implementing a leasing offering. The results of this analysis are represented by the definition of a conceptual PSS scheme (shaded parts in Table 5), whose preliminary assessment is summarized in Table 6.

Table 5. Application of the PSS-Morphological Matrix

Sub-functions	Elementary functions	Product / service actuators			Actuator provider			Actuator receiver		
1. Gathering customer information	N/A	Customer interaction	Online form		Cust.	Manu.	3 rd Party	Cust.	Manu.	3 rd Party
2. Providing cutting	2.1	Leasing	Rental	Purchase	Cust.	Manu.	3 rd Party	Cust.	Manu.	3 rd Party
	2.2	Customer pick-up	Home delivery	—	Cust.	Manu.	3 rd Party	Cust.	Manu.	3 rd Party
	2.3	Product manual	Training	None	Cust.	Manu.	3 rd Party	Cust.	Manu.	3 rd Party
	2.4	Lawn mower			Cust.	Manu.	3 rd Party	Cust.	Manu.	3 rd Party
3. Providing maintenance	3.1	Preventive maintenance	Predictive maintenance	Risk based maintenance	Cust.	Manu.	3 rd Party	Cust.	Manu.	3 rd Party
	3.2	Immediate corrective maintenance	Deferred corrective maintenance	—	Cust.	Manu.	3 rd Party	Cust.	Manu.	3 rd Party
4. Providing EoL service	4.1	Product return	Product take-back	None	Cust.	Manu.	3 rd Party	Cust.	Manu.	3 rd Party
	4.2	Recycling and reuse	Landfill		Cust.	Manu.	3 rd Party	Cust.	Manu.	3 rd Party

Table 6. Qualitative assessment of the proposed solution

Elementary Function	Product/Service Actuator	PSS Provider	PSS Receiver	Value for Provider	Cost for Provider	Value for Receiver	Cost for Receiver
1	Customer interaction	Cust.	Manu.	Information for improvement	Customer care resources	N/A	N/A
2.1	Leasing	Manu.	Cust.	Control over LM	Production and contract	LM	Cost for temporary use of LM
2.2	Home delivery	Manu.	Cust.	N/A	Distribution	LM at his location	N/A
2.3	Training	Manu.	Cust.	N/A	Training personnel	Instructions and knowledge for use of the LM	N/A
2.4	Lawn mower	Cust.	Cust.	Use of LM	Fuel cost	Use of LM	Fuel cost
3.1	Preventive maintenance	Manu.	Cust.	Correct maintenance using original parts and qualified personnel	Maintenance parts and service technicians	Performance and reliability of LM	N/A
3.2	Immediate corrective maintenance	Manu.	Cust.	Correct maintenance using original parts and qualified personnel	Maintenance parts and service technicians	Performance and reliability of LM	N/A
4.1	Product take-back	Manu.	Manu.	N/A	Transportation	LM recovery	N/A
4.2	Recycling and reuse	Manu.	Manu.	N/A	Disassembly and assembly	Reduced production	N/A

The defined PSS concept represents the leasing scheme (6+6) that the manufacturer seeks to implement. The leasing solution consists of the customer leasing the LM to carry out the cutting activities himself while the manufacturer handles the necessary maintenance activities and takes back the product at the end of the lease period (6 years). Furthermore, the manufacturer provides customer training to ensure the proper use of the LM and to help

avoid breakdowns and reduced performance. When maintenance is due (i.e. ordinary), the customer brings the LM to the manufacturer’s center following the schedule provided by the latter. Upon recovery of the LM at the end of the 6th year, the manufacturer provides the customer with a reconditioned LM for another lease period of 6 years. This takes place during winter months when gardening activities are minimal. Thus, the ownership of the LM remains with the manufacturer and the customer is charged a fee for its use for a defined period.

3.3 Feasibility analysis

To better evaluate the feasibility of the PSS concept (i.e. in quantitative terms) the SLCM method is used. It consists of comparing the current sales model (i.e. the Base Scenario (BS)) to the proposed leasing solution (i.e. the Alternative Scenario (AS)).

First of all, the BS is defined according to the following assumptions:

- Lifespan of the LM: 10 years
- Production: 30 LMs per year at a constant basis
- Distribution: the average distance is of 100 km as per the manufacturer’s recommendations
- Maintenance: according to the manufacturer’s recommendations and in collaboration with gardening machinery experts, the maintenance activities can be classified into two categories: ordinary and extraordinary. The schedule of each activity alongside its associated costs (in American dollars (USD)) and duration (in minutes (min)) is depicted as follows:
 - Ordinary Maintenance (OM): (determined per the manufacturer’s recommendations)
 - Per 1 year (OM1): replacement of engine oil, cleaning of fuel and air filters (30 USD; 30 min)
 - Per 2 years (OM2): replacement of engine’s spark plugs (24 USD; 10 min); replacement of the battery (60 USD; 30 min)
 - Per 3 years (OM3): replacement of distribution belt (72 USD; 50 min)
 - Per 5 years (OM5): sharpening of cutting blades (36 USD; 30 min); replacement of fuel and air filters (36 USD, 30 min); replacement of wheels (60 USD; 20 min)
 - Extra-ordinary Maintenance (EM): (determined in accordance with gardening machinery experts and the manufacturer’s experts)
 - Per 2 years (EM2): sharpening of deteriorating blades (36 USD; 30 min)
 - Per 3 years (EM3): repair of malfunctioning engine (60 USD; 30 min); replacement of the throttle cable (24 USD; 20 min)
 - Per 5 years (EM5): replacement of deteriorating battery (60 USD; 30 min); replacement of blades (60 USD; 30 min)

Second, the AS envisages the following changes to the maintenance schedule as the lifecycle of the LM is extended to 12 years given the 6+6 leasing scheme (Table 7).

Table 7. Maintenance interventions in the BS and AS

Year	BS (10-year life cycle)											
	1	2	3	4	5	6	7	8	9	10	11	12
OM1	•	•	•	•	•	•	•	•	•	•		
OM2		•		•		•		•		•		
OM3			•			•			•			
OM5					•					•		
EM2		•		•		•		•		•		
EM3			•			•			•			
EM5					•					•		
AS (12-year life cycle)												
OM1	•	•	•	•	•		•	•	•	•	•	•
OM2		•		•			•		•		•	
OM3			•					•			•	
OM5					•					•		
EM2		•		•			•		•	•		•
EM3			•					•				
EM5					•					•		

The changes to the maintenance schedule also leads to improved costs and time (i.e. intervention duration) which vary as shown in Table 8.

Table 8. Comparative results of maintenance cost and time

	Cost	Time
Base Scenario (10-year life cycle)	1872 USD	1230 min
Alternative Scenario (12-year life cycle)	1854 USD	1270 min
Base Scenario (yearly)	187 USD	123 min
Alternative Scenario (yearly)	155 USD	106 min

Additionally, the Life Cycle Assessment (LCA) method was carried out using SimaPro 7.3 software and the Eco-Indicator 99 (EI99) evaluation criteria (Goedkoop and Spriensma, 1999). Due to manufacturer's privacy concerns, the EoL values cannot be shown but were included to allow an accurate assessment (Figure 3). Then a simulation was run over 15-year period taking into consideration the BS and AS characteristics described earlier (Figure 4).



Figure 3. Comparative LCA results

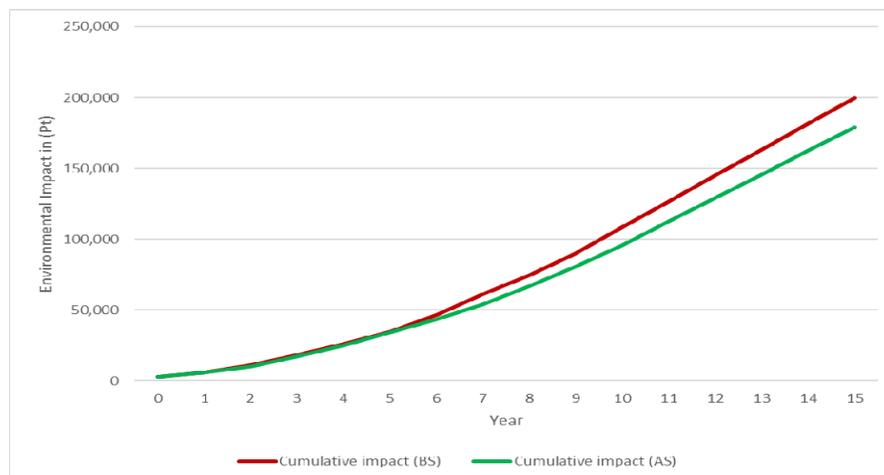


Figure 4. Comparative cumulative environmental impact results

4. Discussion of results

From the case study, it emerged that the proposed approach provided a conceptual solution that portrays benefits from an economic point of view as well as an environmental one. On the one hand, the AS shows a reduced

maintenance time and cost when adopting the leasing option compared to the existing sales model where these factors are higher and confirm the resulting dissatisfaction expressed by the customer

On the other hand, the results of the LCA and the simulation show positive results from adopting a PSS (i.e. leasing) instead of the existing model (i.e. sales). In detail, the LCA shows an environmental impact of 381.6 Pt over 12 years (31.8 Pt/year) compared to 366.8 Pt over 10 years (36.7 Pt/year). In other terms a 13.4% improvement. Moreover, the simulation underlines this improvement as over the course of 15 years, the BS leads to 199,931 Pt while the AS achieves 178,932 Pt. Thus a 10.5% improvement in environmental terms. This is due to the more effective maintenance and EoL activities. In details, the AS, through the recovery of the product and its reconditioning reduce the production resources when manufacturing new LMs. The customer experience and satisfaction is increased as well since the maintenance activities take place at the manufacturer's thus ensuring the product's performances and better reliability given a reduced risk of failures and breakdowns. Accordingly, the manufacturer would benefit from a better reputation of its product, increased customer retention and lower production costs as the EoL measures (i.e. product take-back, recycling and re-use) lead to a reduced amount of resources for further production.

From a more general perspective, the proposed approach can represent an answer to the lack of tools for PSS conceptual design tools, which has been stressed by several authors (i.e. Doualle et al., 2016, Rondini et al., 2017).

In particular, the use of the PSS Morphological Matrix allowed us to provide a solution that matches the customers' requirements with the company needs, augmenting the value of the PSS offering. This result is in line with research findings provided by Kim et al. (2013). Moreover, its combination with other methods (e.g. SLCM) can prevent the occurrence of overdesigning, while augmenting the effectiveness of the conceptual design phase.

In conclusion, in line with Cavalieri et al. (2012), it has to be stressed that the use of a morphological approach can help PSS designers in providing solutions in a structured manner relying on the feasibility and combinability of modular results. Further research work should consider the latter aspect, given the benefits that modularization can have in PSS development (Sun et al., 2017; Sakao et al., 2017).

5. Conclusion

PSSs represent a feasible approach for providing customer value while enhancing environmental sustainability. The main hindrance resides in shifting from product development to PSS development through an effective integration of products and services. To address this topic, the research proposed a functional approach to developing PSSs through morphological reasoning and life cycle modeling. In detail, it showed how the elements of a PSS (products, services, providers and receivers) can be addressed simultaneously and comprehensively at a conceptual stage to ensure an effective design. The case study verified the proposed approach as it led to an improved maintenance schedule. The schedule of the PSS resulted in lower costs and intervention time on one hand, and a better environmental performance on the other.

Nevertheless, some limitations should be noted. For instance, a holistic feasibility analysis should be carried out to ensure the success of the solution and its realizability from a manufacturer's point of view. Life Cycle Costing (LCC) methods can be applied to address the latter. Furthermore, a broader application of the approach to other fields can help refine it and provide further insight concerning its validity and applicability.

References

- Amaya, J., Lelah, A., Zwolinski, P., Design for intensified use in product-service systems using life cycle analysis, *Journal of Engineering Design*, vol. 25, pp. 280-302, 2017.
- Andreasen, MM., The theory of domains. Institute for engineering design, Technical University of Denmark, 1992.
- Aurich, J., Fuchs, C., Devries, MF., An approach to life cycle oriented technical service design, *CIRP Annals of the Journal of Manufacturing Technology*, vol. 53, pp. 151-154, 2004.
- Aurich, J., Fuchs, C., Wagenknecht, C., Life-cycle oriented design of technical product service systems, *Journal of Cleaner Production*, vol. 14, pp. 1480-1494, 2006.
- Aurich, J., Mannweiler, C., Schweitzer, E., How to design and offer services successfully, *CIRP Journal of Manufacturing Science and Technology*, vol. 2, pp. 135-224.
- Baines, TS., Lightfoot, H., Steve, E., Neely, A., Greenough, R., Peppard, J., Roy, R., Shehab E., Braganza, A., Tiwari, A., Alcock, J., August, J., Bastl, M., Cousins, A., Irving, P., Johnson, M., Kingston, J., Lockett, H., Martinez, V., Michelle, P., Tranfield, D., Walton, I., Wilson, H., State of the art in product service systems, *Journal of Engineering Manufacture*, vol. 21, pp. 1543-1552, 2007.

- Barquet, A., Oliveira, M., Amigo, C., Cunha, V., Rozenfeld, H., Employing the business model concept to support the adoption of product service systems, *Journal of Industrial Marketing Management*, vol. 42, pp. 693-704, 2013.
- Beuren, F., Ferreira, M., Migeul, P., Product Service Systems: a literature review on integrated products and services, *Journal of Cleaner Production*, vol. 47, pp. 222-231, 2013.
- Bocken, N., Short, S., Rana, P., Evans, S., A literature and practice review to develop sustainable business model archetypes, *Journal of Cleaner Production*, vol. 65, pp. 42-56, 2014.
- Carreira, R., Patricio, L., Jorge, RN., Magee, CL., Development of an extended Kansei engineering method to incorporate experience requirements in product-service systems design, *Journal of Engineering Design*, vol. 24 no. 10, pp. 738-764, 2013.
- Casadeus, R., Ricart, J., From strategy to business models and onto tactics. Long Range Planning. Elsevier, vol. 43, 2010.
- Cavalieri, S., Pezzotta, G., Product Service Systems Engineering: State of the art and research challenges, *Journal of Cleaner Production*, vol. 63, pp. 278-288, 2012.
- Cavalieri, S., Pezzotta, G., Shimomura, Y., Product service system engineering: from theory to industrial applications, *Computers in Industry*, vol. 63 no. 4, pp. 275-270, 2012.
- Chou, C. J., Chen, C. W., Conley, C., An approach to assessing sustainable product-service systems, *Journal of Cleaner Production*, vol. 86, pp. 277-284, 2015.
- Cluzel, F., Yannou, B., Millet, D., Leroy, Y., Exploitation scenarios in industrial system LCA, *The International Journal of Life Cycle Assessment*, vol. 19 no.1, pp. 231-245, 2014.
- Doualle, B., Medini, K., Boucher, X., Brissaud, D., Laforest, V., Design of sustainable product-service systems (pss): towards an incremental stepwise assessment method, *Procedia CIRP*, vol. 48, pp. 152-157, 2016.
- Durugbo, C, Competitive Product-Service Systems: Lessons from a Multicase Study, *International Journal of Production Research*, vol. 51 no. 19, pp. 5671-5682, 2013.
- Exner, K., Lindow, K., Buccholz, C., Stark, R., Validation of product-service systems - a prototyping approach. Submitted to the proceedings of the 6th Conference on Industrial Product Service Systems, vol. 16, pp. 68-73, 2014.
- Fargnoli, M., Kimura, F., Screening life cycle modelling for sustainable product design. *Innovation in Life Cycle Engineering and Sustainable Development*, Springer edition, pp. 281-292, 2006.
- Fargnoli, M., Costantino, F., Tronci, M., Bisillo, S., Ecological profile of industrial products over the environmental compliance, *International Journal of Sustainable Engineering*, vol. 6 no. 2, pp. 117-130, 2013.
- Fargnoli, M., Sakao, T., Uncovering differences and similarities among Quality Function Deployment based methods in Design for X-benchmarking in different domains, *Quality Engineering*, vol. 29 no. 4, pp. 690-712, 2017.
- Fargnoli, M., De Minicis, M., Tronci, M., Product's life cycle modelling for eco-designing product-service systems. Proceedings of the 12th International Design Conference, *Design 2012*, vol. 2, pp. 869-878, Dubrovnik, Croatia, 2012.
- Fargnoli, M., De Minicis, M., Tronci, M., Design Management for Sustainability: An integrated approach for the development of sustainable products, *Journal of Engineering and Technology Management*, vol. 34, pp. 29-45, 2014.
- Fargnoli, M., Costantino, F., Di Gravio, G., Tronci, M., Product-service-systems implementation: a customized framework to enhance sustainability and customer satisfaction, *Journal of Cleaner Production*, doi: 10.1016/j.jclepro.2018.03.315, 2018.
- George, D., Concept generation using morphological and options matrices. Master's thesis, Clemson University, 2012.
- Geum, Y., Lee, H., Kang, D., Park, Y., The customization framework for roadmapping product-service integration. *Service Business*, vol. 5 no. 3, pp. 213-236, 2011.
- Gluch, P., Baumann, H., The life cycle costing (LCC) approach: A conceptual discussion of its usefulness for environmental decision-making, *Building and Environment*, vol. 39 no. 5, pp. 571-580, 2004.
- Goedkoop, M., Spriensma, R., *The eco-indicator 99: a damage-oriented method for life cycle impact assessment*. Methodology Report and Annex, Pré Consultants, Amersfoort, Netherlands.
- Haber, N., A morphological approach for designing Product-Service System (PSS) Concepts. Paper presented at the *International conference on Industrial Engineering and Operations Management – IEOM*, Rabat, Morocco, 11-13 April 2017.

- Haber, N., Fargnoli, M., Designing product-service systems: a review towards a unified approach, Proceedings of the *International conference on Industrial Engineering and Operations Management – IEOM*, pp. 817-837, Rabat, Morocco, 2017a.
- Haber, N., Fargnoli, M., Design for Product-Service Systems; a procedure to enhance functional integration of product-service offerings, *International Journal of Product Development*, vol. 22 no. 2, pp.135-164, 2017b.
- Kim, S., Yoon, B., Developing a process of concept generation for new product-service systems: a QFD and TRIZ-based approach, *Service Business*, vol. 6 no. 3, pp. 323-348, 2012.
- Kim, Y., Lee S., Jeong, H., Kim, S., Kim, J., Noh, J., Won, J., A systematic design framework for product-service systems and its implementation. Submitted to the proceedings of the *International Conference on Service Science and Innovation*, pp. 59-66, 2013.
- Kimura, F., *Modeling, evaluation and design of product quality under disturbances throughout the total product life cycle*. The Future of Product Development. Ed. F.-L. Krause, Springer, pp. 675-684, 2007.
- Kobayashi, H., A systematic approach to eco-innovative product design based on life cycle planning, *Advanced Engineering Informatics*, vol. 20 no. 2, pp. 113-125, 2006.
- Lee, J., Abu Ali, M., Innovative product advanced service systems (IPASS): methodology, tools, and applications for dominant service design, *International Journal of Advanced Manufacturing Technologies*, vol. 52, pp. 1161-1173, 2010.
- Lindahl, M., Sundin, E., Sakao, T., Environmental and economic benefits of integrated product-service offerings quantified with real business cases, *Journal of Cleaner Production*, vol. 62, pp. 288-296, 2014.
- Marques, P., Cunha, P., Valente, F., Leitao, A., A methodology for product service systems development, Submitted to the proceedings of the *46th International Academy for Production Engineering (CIRP) Conference on Manufacturing Systems*, pp. 371-376, 2013.
- Masanell, R., Ricart, J., From strategy to business models and onto tactics, *Long Range Planning*, vol. 43, pp. 195-215, 2010.
- Maussang, N., Zwolinski, P., Brissaud, D., Product-service system design methodology - from the PSS architecture design to the products specifications, *Journal of Engineering Design*, vol. 20, pp. 349-366, 2009.
- Meier, H., Roy, R., Seliger, G., Industrial product-service systems. Submitted to the proceedings of the *CIRP Annals ISP2*, vol. 59 no. 2, pp. 607-627, 2010.
- Mont, O., Clarifying the concept of product service system, *Journal of Cleaner Production*, vol. 10, pp. 237-245, 2002.
- Morelli, N., Developing new product service systems (pss): methodologies and operational tools, *Journal of Cleaner Production*, vol. 14 no. 27, pp. 1495-1501, 2006.
- Osterwalder, A., Pigneur, Y., *Business model generation: a handbook for visionaries, game changers and challengers*. ISBN: 978-0-470-87641-1, 2010.
- Pahl, G., Beitz, W., *Engineering design - A systematic approach* (3rd edition), Springer, London, 2007.
- Rondini, A., Bertoni, M., Pezzotta, G. An IPA based method for PSS design concept assessment, *Procedia CIRP*, vol. 64, pp. 277-282, 2017.
- Sakao, T., Lindahl, M., *Introduction to Product/Service-system design*, ISBN 978-1-84882-908-4, 2009.
- Sakao, T., Sandstrom, G., Matzen, D., Framing research for service orientaton of manufacturers through PSS approaches, *Journal of Manufacturing Technology Management*, vol. 20 no. 5, pp. 754-778, 2009a.
- Sakao, T., Fargnoli, M., Customization in Ecodesign, *Journal of Industrial Ecology*, vol. 14 no. 4, pp. 529-532, 2010.
- Sakao, T., Song, W., and Matschewsky, J., Creating service modules for customizing product/service systems by extending DSM, *CIRP Annals - Manufacturing Technology*, 66, pp. 21-24, 2017.
- Scheuing, EZ., Johnson EM., A proposed model for new service development, *Journal of Services Marketing*, Vol 3 no. 1, pp. 25-34, 1989.
- Shekar, A., An innovative model of service development: a process guide for service managers, *The Innovation Journal: The Public-Sector Innovation Journal*, vol. 12 no. 1, Article 4, 2007.
- Sousa-Zomer, T. T., Miguel, P. A. C., A QFD-based approach to support sustainable product-service systems conceptual design, *The International Journal of Advanced Manufacturing Technology*, vol. 88 no. 1-4, pp. 701-717, 2017.
- Sun, J., Chai, N., Pi, G., Zhang, Z., Fan, B., Modularization of product service system based on functional requirement, *Procedia CIRP*, vol. 64, pp. 301-305, 2017.
- Tischner, U., Ryan, C., Vezzoli, C., *Product-service systems. Design for sustainability: a global guide module*. United Nations Environment Program (UNEP), 2009.

- Touzi, W., Alix, T., Vallespir, B., Contribution to the development of a conceptual model of service and service delivery, *International Federation for Information Processing publications IFIP*, 398, pp. 369-376.
- Tran, T., Park, J., Development of integrated design methodology for various types of product service systems, *Journal of Computational Design and Engineering*, vol. 1 no. 1, pp. 37-47, 2014.
- Tran, T., Park, J., (2015). Development of a novel set of criteria to select methodology for designing product service systems, *Journal of Computational Design and Engineering*, vol. 3 no. 2, pp. 112-120, 2015.
- Trevisan, L., Brissaud, D., Engineering models to support product-service system integrated design. *CIRP Journal of Manufacturing Science and Technology*, 2016.
- Tukker, A., Eight types of product service system: eight ways to sustainability? Experiences from suspronet, *Business Strategy and the Environment*, vol. 13, no. 4, pp. 246–260, 2004.
- Tukker, A., Product services for a resource-efficient and circular economy - a review, *Journal of Cleaner Production*, vol. 38, pp. 1-16, 2013.
- Tukker, A., Tischner, U., Product-services as a research field: past present and future - reflections from a decade of research, *Journal of Cleaner Production*, vol. 14 no. 17, pp. 1552–1556, 2006.
- Ulrich, K. T., S. D, Eppinger., *Product Design and Development*, New York: McGraw Hill, 2008.
- Umeda, Y., Takata, S., Kimura, F., Tomiyama, T., Sutherland, J. W., Kara, S., Herrmann, C., Dufloy, J. R., Toward integrated product and process life cycle planning—An environmental perspective, *CIRP Annals-Manufacturing Technology*, vol. 61 no. 2, pp. 681-702, 2012.
- Vasanth, G., Vijaykumar, G., Roy, R., Lelah, A., Brissaud, D., A review of product service systems design methodologies, *Journal of Engineering Design*, vol. 23, no. 9, pp. 635-659, 2012.
- Vezzoli, C., Ceschin, F., Diehl, J. C., Kohtala, C., New design challenges to widely implement Sustainable Product–Service Systems, *Journal of Cleaner Production*, vol. 97, pp. 1-12, 2015.
- Zine, PU., Kulkarni, MS., Ray, AK., Chawla., R., Designing flexible service systems: Application to machine tools, *Journal of Intelligent Manufacturing*, pp. 1-23, 2014.
- Zwicky, F., Morphological Astronomy, *The Observatory*, vol. 68, pp. 121-143, 1948.

Biographies

Nicolas Haber is an Industrial Engineer holding a PhD in Industrial Engineering and Engineering Management from Sapienza - University of Rome which he earned in 2017. His field of research is the design of product-service systems in a sustainable manner. He holds master's degrees in mechatronics engineering and industrial engineering management. Moreover, he has two years' experience at Heineken and obtained the 6-Sigma black belt certificate.

Mario Fargnoli is currently employed at the Italian Ministry of Agriculture as Technical Director and collaborates with Sapienza - University of Rome as Adjunct Professor. He worked at the Department of Precision Machinery of the University of Tokyo as JSPS Fellow Researcher. He earned his PhD in Energetics (Design for Sustainable Product Development) at Sapienza - University of Rome. His research interests and publications mainly concern ecodesign, design for safety, as well as engineering design tools and methods.

Massimo Tronci, PhD in Energetics, is Full Professor of Industrial Systems Engineering and Director of the PhD School in Industrial and Management Engineering at Sapienza - University of Rome. His teaching activities concern Industrial Systems Engineering, Operations Management and Smart Factory in the Faculty of Civil and Industrial Engineering. His main research topics are: Supply Chain Management, Operations Management, Quality and Safety Management

Ahmad Ababneh is a PhD student in Management, Banking and Commodity Sciences at Sapienza – University of Rome. His research areas concern operations and risk management, managerial accounting, corporate governance and organizational performance. Moreover, he holds a CMA (Certified Management Accountant) part one certification.